

OAK MARSHAL

Top layer approx. 3,6 mm

Maintenance oil white



Admonter FLOORS on underfloor heating systems

Admonter FLOORS are ideally suited for underfloor heating systems. We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small, they have to be fully glued down). We recommend hot-water underfloor heating systems set at low temperature. Please find detailed information in the information sheet Admonter FLOORS on underfloor heating systems!


Admonter accessories

The wide range of accessories matches the Admonter FLOORS and includes flush-mount skirting and solutions for staircases.

Regular care and maintenance

Please see the Admonter maintenance & installation instructions or visit www.admonter.eu/en/downloads/.

PLEASE NOTE: natural oiled easy care - NO INITIAL OIL TREATMENT IS REQUIRED! Repair and supplementary oils you can find in our Admonter price list. Further information about our products can be found at admonter.at

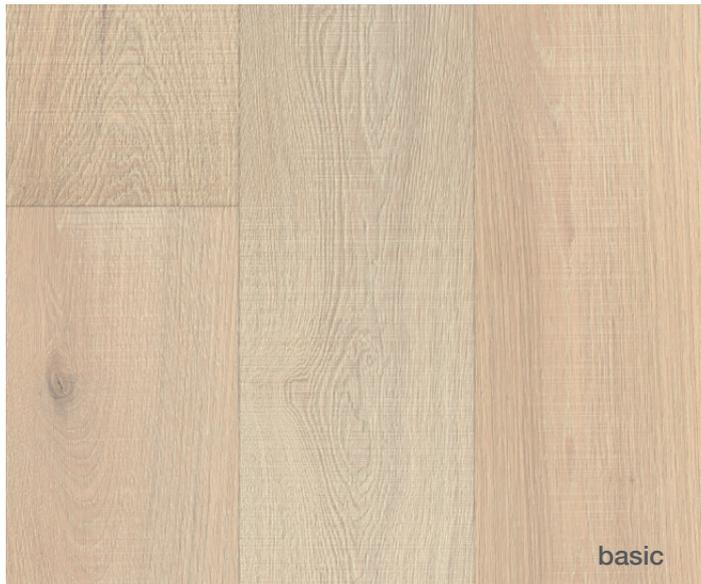

FLOOR S

| Grading | Thickness (mm) | Construction | Width (mm) | Length (mm) | Texture | Finish | Profile | |
|----------|----------------|--------------|------------|-------------|--------------------|--------|---------|-----------------|
| noblesse | 15 | 3-layer | 192 | classic | 1850 / 2000 / 2400 | used | ng | Tongue & groove |
| | | | | | | used | ng | lock-it |
| basic | 15 | 3-layer | 192 | classic | 1850 / 2000 / 2400 | used | ng | Tongue & groove |
| | | | | | | used | ng | lock-it |

Backing: Solid wood / ng: natural oiled easy care / pc: natural oiled pro care / ml: matt lacquer

Technical information

More information (for example concerning fire classification) in the accompanying information to CE-marking at <http://www.admonter.eu/en/downloads/>

| Type of wood | Thickness (mm) | Weight [kg/m ²] | Moisture content [%] | Lambda [W/m K] | D-Value R[m ² K/W] | Hardness [N/mm ²] | Fire classification |
|--------------|----------------|-----------------------------|----------------------|----------------|-------------------------------|-------------------------------|---------------------|
| Oak LH-RS | 15 | 8,6 | 7+/-2 | 0,15 | 0,100 | 41 | C _e -s1 |
| Oak NH-RS | 15 | 7,8 | 7+/-2 | 0,14 | 0,107 | 41 | C _e -s1 |

LH-RS: Hardwood-Backing / NH-RS: Softwood-Backing

